
Handie


Handie



Housing	SS316L, Aluminium
Rated power [W]	2
Light source	LED Module (replaceable)
Lumen output [lm]	170 - 195 lm
Luminous flux tolerance	10%
SDCM colour tolerance	<3
Light distribution / Emission	Symmetric, Oval, Asymmetric
IP protection class	IP67
Impact resistance	IK 06 / IK10 (on request)
Working temperature range	-35°C ÷ +65°C
Lifetime L80B10	>75 000h
Protection class	III
Wiring	PC Teflon
Connection	0,15 m
Dimming	ON-OFF / DALI
Power supplies	apart from the luminaire / built-in
Dimensions	Dia: 16mm x H: 16mm
Power supply type	LV: 24V DC / CC: 350mA
CRI	90

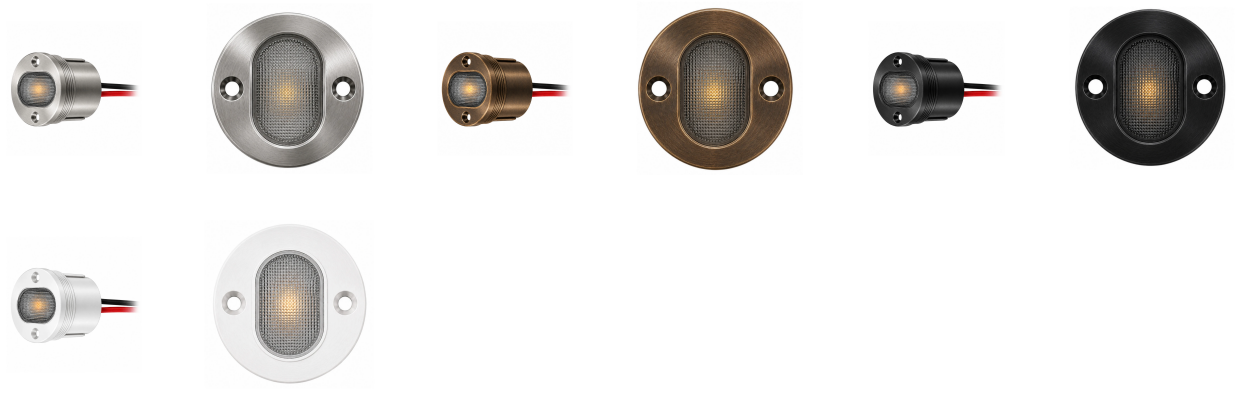

Dimensions

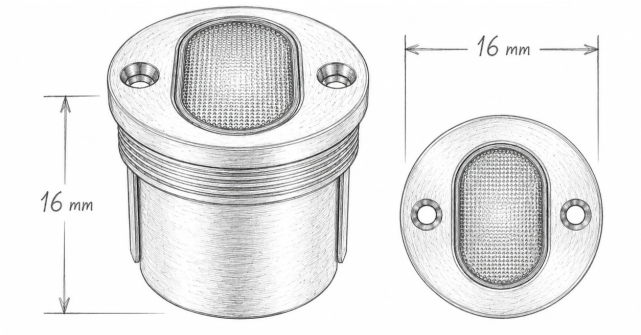

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_114651

Variants

Photo	P/N	[W]	[LM]	[K]	CRI/Ra>	PSU Type	DEG	Front material	Housing	Dimming
	HANDIE-2-NW-AS-RD-AAB-CC	2	195lm	4000K	90	350mA	asymmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-AS-RD-AAB-LV	2	195lm	4000K	90	24V DC	asymmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-NW-AS-RD-AABR-CC	2	195lm	4000K	90	350mA	asymmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-NW-AS-RD-AABR-LV	2	195lm	4000K	90	24V DC	asymmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-NW-AS-RD-AAS-CC	2	195lm	4000K	90	350mA	asymmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-NW-AS-RD-AAS-LV	2	195lm	4000K	90	24V DC	asymmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-NW-AS-RD-AAW-CC	2	195lm	4000K	90	350mA	asymmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-AS-RD-AAW-LV	2	195lm	4000K	90	24V DC	asymmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-NW-AS-RD-SA-CC	2	195lm	4000K	90	350mA	asymmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-NW-AS-RD-SA-LV	2	195lm	4000K	90	24V DC	asymmetric	SS316L	Aluminium	DALI
	HANDIE-2-NW-AS-RD-SS-CC	2	195lm	4000K	90	350mA	asymmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-NW-AS-RD-SS-LV	2	195lm	4000K	90	24V DC	asymmetric	SS316L	SS316L	DALI
	HANDIE-2-NW-OV-RD-AAB-CC	2	195lm	4000K	90	350mA	Oval	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-OV-RD-AAB-LV	2	195lm	4000K	90	24V DC	Oval	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-NW-OV-RD-AABR-CC	2	195lm	4000K	90	350mA	Oval	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-NW-OV-RD-AABR-LV	2	195lm	4000K	90	24V DC	Oval	Aluminium Brown	Aluminium	DALI
	HANDIE-2-NW-OV-RD-AAS-CC	2	195lm	4000K	90	350mA	Oval	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-NW-OV-RD-AAS-LV	2	195lm	4000K	90	24V DC	Oval	Aluminium Silver	Aluminium	DALI
	HANDIE-2-NW-OV-RD-AAW-CC	2	195lm	4000K	90	350mA	Oval	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-OV-RD-AAW-LV	2	195lm	4000K	90	24V DC	Oval	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-NW-OV-RD-SA-CC	2	195lm	4000K	90	350mA	Oval	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-NW-OV-RD-SA-LV	2	195lm	4000K	90	24V DC	Oval	SS316L	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_114651

	HANDIE-2-NW-OV-RD-SS-CC	2	195lm	4000K	90	350mA	Oval	SS316L	SS316L	DALI (External driver)
	HANDIE-2-NW-OV-RD-SS-LV	2	195lm	4000K	90	24V DC	Oval	SS316L	SS316L	DALI
	HANDIE-2-NW-SM-RD-AAB-CC	2	195lm	4000K	90	350mA	symmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-SM-RD-AAB-LV	2	195lm	4000K	90	24V DC	symmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-NW-SM-RD-AABR-CC	2	195lm	4000K	90	350mA	symmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-NW-SM-RD-AABR-LV	2	195lm	4000K	90	24V DC	symmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-NW-SM-RD-AAS-CC	2	195lm	4000K	90	350mA	symmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-NW-SM-RD-AAS-LV	2	195lm	4000K	90	24V DC	symmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-NW-SM-RD-AAW-CC	2	195lm	4000K	90	350mA	symmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-NW-SM-RD-AAW-LV	2	195lm	4000K	90	24V DC	symmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-NW-SM-RD-SA-CC	2	195lm	4000K	90	350mA	symmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-NW-SM-RD-SA-LV	2	195lm	4000K	90	24V DC	symmetric	SS316L	Aluminium	DALI
	HANDIE-2-NW-SM-RD-SS-CC	2	195lm	4000K	90	350mA	symmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-NW-SM-RD-SS-LV	2	195lm	4000K	90	24V DC	symmetric	SS316L	SS316L	DALI
	HANDIE-2-VW-AS-RD-AAB-CC	2	170lm	2700K	90	350mA	asymmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-AS-RD-AAB-LV	2	170lm	2700K	90	24V DC	asymmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-VW-AS-RD-AABR-CC	2	170lm	2700K	90	350mA	asymmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-VW-AS-RD-AABR-LV	2	170lm	2700K	90	24V DC	asymmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-VW-AS-RD-AAS-CC	2	170lm	2700K	90	350mA	asymmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-VW-AS-RD-AAS-LV	2	170lm	2700K	90	24V DC	asymmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-VW-AS-RD-AAW-CC	2	170lm	2700K	90	350mA	asymmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-AS-RD-AAW-LV	2	170lm	2700K	90	24V DC	asymmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-VW-AS-RD-SA-CC	2	170lm	2700K	90	350mA	asymmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-VW-AS-RD-SA-LV	2	170lm	2700K	90	24V DC	asymmetric	SS316L	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_114651

	HANDIE-2-VW-AS-RD-SS-CC	2	170lm	2700K	90	350mA	asymmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-VW-AS-RD-SS-LV	2	170lm	2700K	90	24V DC	asymmetric	SS316L	SS316L	DALI
	HANDIE-2-VW-OV-RD-AAB-CC	2	170lm	2700K	90	350mA	Oval	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-OV-RD-AAB-LV	2	170lm	2700K	90	24V DC	Oval	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-VW-OV-RD-AABR-CC	2	170lm	2700K	90	350mA	Oval	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-VW-OV-RD-AABR-LV	2	170lm	2700K	90	24V DC	Oval	Aluminium Brown	Aluminium	DALI
	HANDIE-2-VW-OV-RD-AAS-CC	2	170lm	2700K	90	350mA	Oval	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-VW-OV-RD-AAS-LV	2	170lm	2700K	90	24V DC	Oval	Aluminium Silver	Aluminium	DALI
	HANDIE-2-VW-OV-RD-AAW-CC	2	170lm	2700K	90	350mA	Oval	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-OV-RD-AAW-LV	2	170lm	2700K	90	24V DC	Oval	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-VW-OV-RD-SA-CC	2	170lm	2700K	90	350mA	Oval	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-VW-OV-RD-SA-LV	2	170lm	2700K	90	24V DC	Oval	SS316L	Aluminium	DALI
	HANDIE-2-VW-OV-RD-SS-CC	2	170lm	2700K	90	350mA	Oval	SS316L	SS316L	DALI (External driver)
	HANDIE-2-VW-OV-RD-SS-LV	2	170lm	2700K	90	24V DC	Oval	SS316L	SS316L	DALI
	HANDIE-2-VW-SM-RD-AAB-CC	2	170lm	2700K	90	350mA	symmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-SM-RD-AAB-LV	2	170lm	2700K	90	24V DC	symmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-VW-SM-RD-AABR-CC	2	170lm	2700K	90	350mA	symmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-VW-SM-RD-AABR-LV	2	170lm	2700K	90	24V DC	symmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-VW-SM-RD-AAS-CC	2	170lm	2700K	90	350mA	symmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-VW-SM-RD-AAS-LV	2	170lm	2700K	90	24V DC	symmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-VW-SM-RD-AAW-CC	2	170lm	2700K	90	350mA	symmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-VW-SM-RD-AAW-LV	2	170lm	2700K	90	24V DC	symmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-VW-SM-RD-SA-CC	2	170lm	2700K	90	350mA	symmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-VW-SM-RD-SA-LV	2	170lm	2700K	90	24V DC	symmetric	SS316L	Aluminium	DALI

	HANDIE-2-VW-SM-RD-SS-CC	2	170lm	2700K	90	350mA	symmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-VW-SM-RD-SS-LV	2	170lm	2700K	90	24V DC	symmetric	SS316L	SS316L	DALI
	HANDIE-2-WW-AS-RD-AAB-CC	2	190lm	3000K	90	350mA	asymmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-AS-RD-AAB-LV	2	190lm	3000K	90	24V DC	asymmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-WW-AS-RD-AABR-CC	2	190lm	3000K	90	350mA	asymmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-WW-AS-RD-AABR-LV	2	190lm	3000K	90	24V DC	asymmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-WW-AS-RD-AAS-CC	2	190lm	3000K	90	350mA	asymmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-WW-AS-RD-AAS-LV	2	190lm	3000K	90	24V DC	asymmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-WW-AS-RD-AAW-CC	2	190lm	3000K	90	350mA	asymmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-AS-RD-AAW-LV	2	190lm	3000K	90	24V DC	asymmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-WW-AS-RD-SA-CC	2	190lm	3000K	90	350mA	asymmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-WW-AS-RD-SA-LV	2	190lm	3000K	90	24V DC	asymmetric	SS316L	Aluminium	DALI
	HANDIE-2-WW-AS-RD-SS-CC	2	190lm	3000K	90	350mA	asymmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-WW-AS-RD-SS-LV	2	190lm	3000K	90	24V DC	asymmetric	SS316L	SS316L	DALI
	HANDIE-2-WW-OV-RD-AAB-CC	2	190lm	3000K	90	350mA	Oval	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-OV-RD-AAB-LV	2	190lm	3000K	90	24V DC	Oval	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-WW-OV-RD-AABR-CC	2	190lm	3000K	90	350mA	Oval	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-WW-OV-RD-AABR-LV	2	190lm	3000K	90	24V DC	Oval	Aluminium Brown	Aluminium	DALI
	HANDIE-2-WW-OV-RD-AAS-CC	2	190lm	3000K	90	350mA	Oval	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-WW-OV-RD-AAS-LV	2	190lm	3000K	90	24V DC	Oval	Aluminium Silver	Aluminium	DALI
	HANDIE-2-WW-OV-RD-AAW-CC	2	190lm	3000K	90	350mA	Oval	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-OV-RD-AAW-LV	2	190lm	3000K	90	24V DC	Oval	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-WW-OV-RD-SA-CC	2	190lm	3000K	90	350mA	Oval	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-WW-OV-RD-SA-LV	2	190lm	3000K	90	24V DC	Oval	SS316L	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_114651

	HANDIE-2-WW-OV-RD-SS-CC	2	190lm	3000K	90	350mA	Oval	SS316L	SS316L	DALI (External driver)
	HANDIE-2-WW-OV-RD-SS-LV	2	190lm	3000K	90	24V DC	Oval	SS316L	SS316L	DALI
	HANDIE-2-WW-SM-RD-AAB-CC	2	190lm	3000K	90	350mA	symmetric	Aluminium Black Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-SM-RD-AAB-LV	2	190lm	3000K	90	24V DC	symmetric	Aluminium Black Mat	Aluminium	DALI
	HANDIE-2-WW-SM-RD-AABR-CC	2	190lm	3000K	90	350mA	symmetric	Aluminium Brown	Aluminium	DALI (External driver)
	HANDIE-2-WW-SM-RD-AABR-LV	2	190lm	3000K	90	24V DC	symmetric	Aluminium Brown	Aluminium	DALI
	HANDIE-2-WW-SM-RD-AAS-CC	2	190lm	3000K	90	350mA	symmetric	Aluminium Silver	Aluminium	DALI (External driver)
	HANDIE-2-WW-SM-RD-AAS-LV	2	190lm	3000K	90	24V DC	symmetric	Aluminium Silver	Aluminium	DALI
	HANDIE-2-WW-SM-RD-AAW-CC	2	190lm	3000K	90	350mA	symmetric	Aluminium White Mat	Aluminium	DALI (External driver)
	HANDIE-2-WW-SM-RD-AAW-LV	2	190lm	3000K	90	24V DC	symmetric	Aluminium White Mat	Aluminium	DALI
	HANDIE-2-WW-SM-RD-SA-CC	2	190lm	3000K	90	350mA	symmetric	SS316L	Aluminium	DALI (External driver)
	HANDIE-2-WW-SM-RD-SA-LV	2	190lm	3000K	90	24V DC	symmetric	SS316L	Aluminium	DALI
	HANDIE-2-WW-SM-RD-SS-CC	2	190lm	3000K	90	350mA	symmetric	SS316L	SS316L	DALI (External driver)
	HANDIE-2-WW-SM-RD-SS-LV	2	190lm	3000K	90	24V DC	symmetric	SS316L	SS316L	DALI

GENERAL TERMS OF USE

- Before using a luminaire, make sure what voltage range it is designed to.
- Connecting to the power supply should be done when the power supply is off.
- Use appropriate sockets and plugs: Ensure that your electrical sockets and plugs are compatible with the lamp's voltage and plug type.
- Use appropriate wiring for luminaires.
- Avoid overloading electrical circuits by not connecting too many lamps to a single outlet or circuit. Check the condition of the power cord and plug for any signs of damage or wear.
- Pay attention to the correct polarity when connecting the luminaires. Incorrect polarity may prevent the luminaires from functioning properly or could potentially damage them.
- Installation of the luminaires should be done by qualified person.
- Keep your luminaires clean and free from dust and debris, as it can affect their performance.
- Follow the luminaire connection diagram above.
- Avoid direct exposure of bright light sources to your eyes. Position luminaires in a way that minimizes direct glare or uncomfortable brightness.
- Ensure that the luminaire is placed on a stable surface and kept away from flammable materials. Allow sufficient clearance around the luminaire to prevent overheating.
- Keep away from fire.

Niviss is not responsible for any damage or failure due to not comply with above rules. Otherwise, the complaint will not be taken into account.

ENVIRONMENTAL CAUTION!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.