NWALL TUBE ROUND



Housing	Aluminium
Glass type	Tempered
Light source	LED Module (replaceable)
Lumen output [lm]	1908 - 3120lm
Luminous flux tolerance	10%
SDCM colour tolerance	<3
Light distribution / Emission	indirect
Angle of distribution	↓18°/18°↑ ; ↓24°/24°↑ ; ↓36°/36°↑
IP protection class	IP65
Impact resistance	IK07
Working temperature range	-20°C ÷ +55°C
Lifetime L80B10	60 000h
Protection class	I
Wiring	PC Rubber Cable 3x0.5mm^2
Connection	0,2m
Dimming	ON-OFF / DALI
Power supplies	built-in
Dimensions	L: 100mm x H: 220mm x W: 100mm
Power supply type	220-240V AC
CRI	80
Rated power [W]	24, 43






Accessories



NWALL-TUBE-ROUND-COWL

Niviss reserves the right to make technical changes without prior notice
product_card_20261116_192920

Dimensions

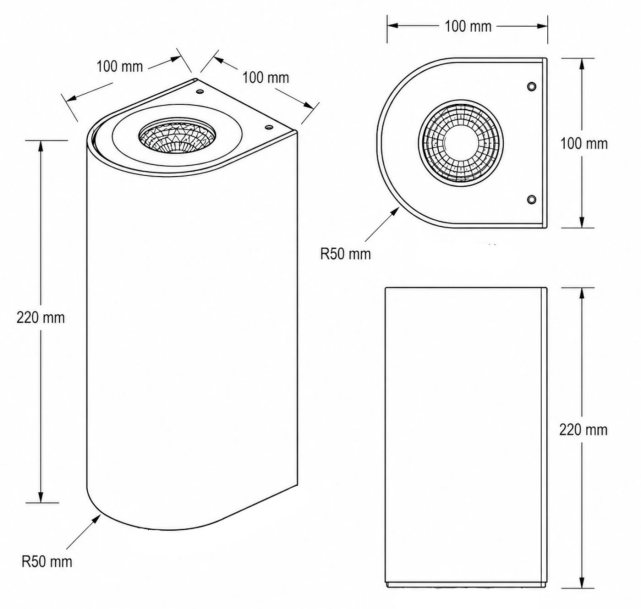

Niviss reserves the right to make technical changes without prior notice
product_card_20261116_192920

Variants

Photo	P/N	[W]	[LM]	[K]	CRI/Ra>	PSU Type	DEG	Painting	Housing	Dimming
	NWALL-TUBE-24-NW-18-RD-AM-HV-D	24	2350lm	4000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-18-RD-AM-HV-O	24	2350lm	4000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-18-RD-BM-HV-D	24	2350lm	4000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-18-RD-BM-HV-O	24	2350lm	4000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-24-RD-AM-HV-D	24	2350lm	4000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-24-RD-AM-HV-O	24	2350lm	4000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-24-RD-BM-HV-D	24	2350lm	4000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-24-RD-BM-HV-O	24	2350lm	4000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-36-RD-AM-HV-D	24	2350lm	4000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-36-RD-AM-HV-O	24	2350lm	4000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-NW-36-RD-BM-HV-D	24	2350lm	4000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261116_192920

	NWALL-TUBE-24-NW-36-RD-BM-HV-O	24	2350lm	4000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-18-RD-AM-HV-D	24	1825lm	3000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-18-RD-AM-HV-O	24	1825lm	3000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-18-RD-BM-HV-D	24	1825lm	3000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-18-RD-BM-HV-O	24	1825lm	3000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-24-RD-AM-HV-D	24	1825lm	3000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-24-RD-AM-HV-O	24	1825lm	3000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-24-RD-BM-HV-D	24	1825lm	3000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-24-RD-BM-HV-O	24	1825lm	3000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-36-RD-AM-HV-D	24	1825lm	3000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-36-RD-AM-HV-O	24	1825lm	3000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-24-WW-36-RD-BM-HV-D	24	1825lm	3000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI

	NWALL-TUBE-24-WW-36-RD-BM-HV-O	24	1825lm	3000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-18-RD-AM-HV-D	43	3080lm	4000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-18-RD-AM-HV-O	43	3080lm	4000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-18-RD-BM-HV-D	43	3080lm	4000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-18-RD-BM-HV-O	43	3080lm	4000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-24-RD-AM-HV-D	43	3080lm	4000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-24-RD-AM-HV-O	43	3080lm	4000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-24-RD-BM-HV-D	43	3080lm	4000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-24-RD-BM-HV-O	43	3080lm	4000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-36-RD-AM-HV-D	43	3080lm	4000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-36-RD-AM-HV-O	43	3080lm	4000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-NW-36-RD-BM-HV-D	43	3080lm	4000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI

	NWALL-TUBE-43-NW-36-RD-BM-HV-O	43	3080lm	4000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-18-RD-AM-HV-D	43	2930lm	3000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-18-RD-AM-HV-O	43	2930lm	3000K	80	220-240V AC	18	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-18-RD-BM-HV-D	43	2930lm	3000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-18-RD-BM-HV-O	43	2930lm	3000K	80	220-240V AC	18	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-24-RD-AM-HV-D	43	2930lm	3000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-24-RD-AM-HV-O	43	2930lm	3000K	80	220-240V AC	24	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-24-RD-BM-HV-D	43	2930lm	3000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-24-RD-BM-HV-O	43	2930lm	3000K	80	220-240V AC	24	Black Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-36-RD-AM-HV-D	43	2930lm	3000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-36-RD-AM-HV-O	43	2930lm	3000K	80	220-240V AC	36	Anthracite Mat	Aluminium	ON-OFF / DALI
	NWALL-TUBE-43-WW-36-RD-BM-HV-D	43	2930lm	3000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI

	NWALL-TUBE-43-WW-36-RD-BM-HV-O	43	2930lm	3000K	80	220-240V AC	36	Black Mat	Aluminium	ON-OFF / DALI

GENERAL TERMS OF USE

- Before using a luminaire, make sure what voltage range it is designed to.
- Connecting to the power supply should be done when the power supply is off.
- Use appropriate sockets and plugs: Ensure that your electrical sockets and plugs are compatible with the lamp's voltage and plug type.
- Use appropriate wiring for luminaires.
- Avoid overloading electrical circuits by not connecting too many lamps to a single outlet or circuit. Check the condition of the power cord and plug for any signs of damage or wear.
- Pay attention to the correct polarity when connecting the luminaires. Incorrect polarity may prevent the luminaires from functioning properly or could potentially damage them.
- Installation of the luminaires should be done by qualified person.
- Keep your luminaires clean and free from dust and debris, as it can affect their performance.
- Follow the luminaire connection diagram above.
- Avoid direct exposure of bright light sources to your eyes. Position luminaires in a way that minimizes direct glare or uncomfortable brightness.
- Ensure that the luminaire is placed on a stable surface and kept away from flammable materials. Allow sufficient clearance around the luminaire to prevent overheating.
- Keep away from fire.

Niviss is not responsible for any damage or failure due to not comply with above rules. Otherwise, the complaint will not be taken into account.

ENVIRONMENTAL CAUTION!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.