FLOODIE-XL

FLOODIE-XL



Housing	Aluminium
Glass type	Tempered
Light source	LED Module (replaceable)
Luminous flux tolerance	10%
SDCM colour tolerance	<3
Light distribution / Emission	symmetric / direct
IP protection class	IP67
Impact resistance	IK06
Working temperature range	-35°C ÷ +65°C
Lifetime L80B10	>75 000h
Protection class	HV: I; LV: III
Wiring	HV: H07RN-F 3G1 / LV: H07RN-F 2X1.5
Connection	1m
Dimming	LV: DALI / DALI2; HV: ON-OFF / TRIAC (on request)
Power supplies	built-in
Angle of distribution	10, 23, 36
Rated power [W]	25
Lumen output [lm]	2270-2450lm
Power supply type	HV: 100-245V AC 50/60Hz ; LV: 24V DC
CRI	>90 / >80



Accessories



FLOODIE-SPIKE-44-205-M6x10MM



FLOODIE-XL-BASE-xx-91-10



FLOODIE-TREE-BELT-S-yy





FLOODIE-TREE-BELT-N-yy



Honeycomb

Dimensions

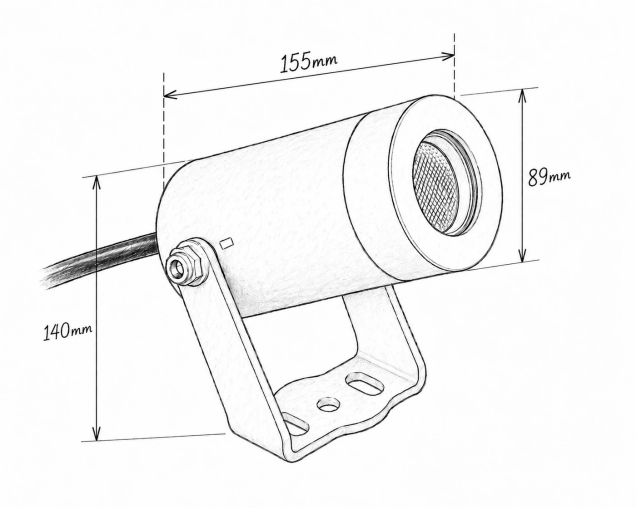

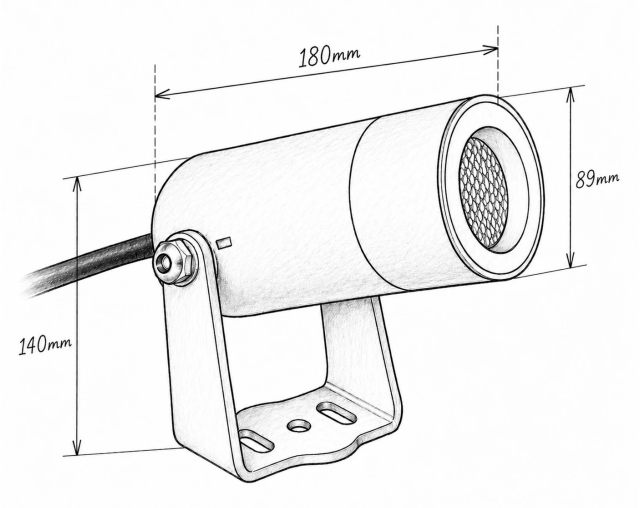

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

Variants

Photo	P/N	[W]	[LM]	[K]	CRI/Ra>	PSU Type	DEG	Painting	Housing	Dimming
	FLOODIE-XL-F-25-CW-10-BM-HV	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-BM-HV-US	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-BM-LV	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-10-BM-LV-UB	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-10-BM-LV-US	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-10-BR-HV	25	2390lm	6000K	80	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-BR-LV	25	2450lm	6000K	80	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-CW-10-GD-HV	25	2390lm	6000K	80	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-GD-LV	25	2450lm	6000K	80	24V DC	10	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-CW-10-WM-HV	25	2390lm	6000K	80	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-10-WM-LV	25	2450lm	6000K	80	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-23-BM-HV	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-BM-HV-US	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-BM-LV	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-23-BM-LV-UB	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-23-BM-LV-US	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-23-BR-HV	25	2390lm	6000K	80	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-BR-LV	25	2450lm	6000K	80	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-CW-23-GD-HV	25	2390lm	6000K	80	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-GD-LV	25	2450lm	6000K	80	24V DC	23	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-CW-23-WM-HV	25	2390lm	6000K	80	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-23-WM-LV	25	2450lm	6000K	80	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-BM-HV	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-BM-HV-US	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-BM-LV	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-BM-LV-UB	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-BM-LV-US	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-BR-HV	25	2390lm	6000K	80	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-BR-LV	25	2450lm	6000K	80	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-GD-HV	25	2390lm	6000K	80	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-GD-LV	25	2450lm	6000K	80	24V DC	36	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-CW-36-WM-HV	25	2390lm	6000K	80	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-CW-36-WM-LV	25	2450lm	6000K	80	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-10-BM-HV	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-BM-HV-US	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-BM-LV	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-10-BM-LV-UB	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-10-BM-LV-US	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-10-BR-HV	25	2350lm	4000K	80	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-BR-LV	25	2410lm	4000K	80	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-NW-10-GD-HV	25	2350lm	4000K	80	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-GD-LV	25	2410lm	4000K	80	24V DC	10	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-NW-10-WM-HV	25	2350lm	4000K	80	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-10-WM-LV	25	2410lm	4000K	80	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-BM-HV	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-BM-HV-US	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-BM-LV	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-BM-LV-UB	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-BM-LV-US	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-BR-HV	25	2350lm	4000K	80	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-BR-LV	25	2410lm	4000K	80	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-GD-HV	25	2350lm	4000K	80	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-GD-LV	25	2410lm	4000K	80	24V DC	23	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-NW-23-WM-HV	25	2350lm	4000K	80	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-23-WM-LV	25	2410lm	4000K	80	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-36-BM-HV	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-BM-HV-US	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-BM-LV	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-36-BM-LV-UB	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-36-BM-LV-US	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-NW-36-BR-HV	25	2350lm	4000K	80	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-BR-LV	25	2410lm	4000K	80	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-NW-36-GD-HV	25	2350lm	4000K	80	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-GD-LV	25	2410lm	4000K	80	24V DC	36	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-NW-36-WM-HV	25	2350lm	4000K	80	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-NW-36-WM-LV	25	2410lm	4000K	80	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-BM-HV	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-BM-HV-US	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-BM-LV	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-BM-LV-UB	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-BM-LV-US	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-BR-HV	25	2270lm	2700K	90	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-BR-LV	25	2350lm	2700K	90	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-GD-HV	25	2270lm	2700K	90	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-GD-LV	25	2350lm	2700K	90	24V DC	10	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-VW-10-WM-HV	25	2270lm	2700K	90	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-10-WM-LV	25	2350lm	2700K	90	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-23-BM-HV	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-BM-HV-US	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-BM-LV	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-23-BM-LV-UB	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-23-BM-LV-US	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-23-BR-HV	25	2270lm	2700K	90	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-BR-LV	25	2350lm	2700K	90	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-VW-23-GD-HV	25	2270lm	2700K	90	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-GD-LV	25	2350lm	2700K	90	24V DC	23	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-VW-23-WM-HV	25	2270lm	2700K	90	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-23-WM-LV	25	2350lm	2700K	90	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-BM-HV	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-BM-HV-US	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-BM-LV	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-BM-LV-UB	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-BM-LV-US	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-BR-HV	25	2270lm	2700K	90	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-BR-LV	25	2350lm	2700K	90	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-GD-HV	25	2270lm	2700K	90	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-GD-LV	25	2350lm	2700K	90	24V DC	36	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-VW-36-WM-HV	25	2270lm	2700K	90	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-VW-36-WM-LV	25	2350lm	2700K	90	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-10-BM-HV	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-BM-HV-US	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-BM-LV	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-10-BM-LV-UB	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-10-BM-LV-US	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-10-BR-HV	25	2320lm	3000K	90	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-BR-LV	25	2390lm	3000K	90	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-WW-10-GD-HV	25	2320lm	3000K	90	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-GD-LV	25	2390lm	3000K	90	24V DC	10	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-WW-10-WM-HV	25	2320lm	3000K	90	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-10-WM-LV	25	2390lm	3000K	90	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-BM-HV	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-BM-HV-US	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-BM-LV	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-BM-LV-UB	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-BM-LV-US	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-BR-HV	25	2320lm	3000K	90	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-BR-LV	25	2390lm	3000K	90	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-GD-HV	25	2320lm	3000K	90	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-GD-LV	25	2390lm	3000K	90	24V DC	23	Dark Grey	Aluminium	DALI
	FLOODIE-XL-F-25-WW-23-WM-HV	25	2320lm	3000K	90	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-23-WM-LV	25	2390lm	3000K	90	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-36-BM-HV	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-BM-HV-US	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-BM-LV	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-36-BM-LV-UB	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-36-BM-LV-US	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-F-25-WW-36-BR-HV	25	2320lm	3000K	90	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-BR-LV	25	2390lm	3000K	90	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-F-25-WW-36-GD-HV	25	2320lm	3000K	90	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-GD-LV	25	2390lm	3000K	90	24V DC	36	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-F-25-WW-36-WM-HV	25	2320lm	3000K	90	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-F-25-WW-36-WM-LV	25	2390lm	3000K	90	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-BM-HV	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-BM-HV-US	25	2390lm	6000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-BM-LV	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-BM-LV-UB	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-BM-LV-US	25	2450lm	6000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-BR-HV	25	2390lm	6000K	80	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-BR-LV	25	2450lm	6000K	80	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-GD-HV	25	2390lm	6000K	80	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-GD-LV	25	2450lm	6000K	80	24V DC	10	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-CW-10-WM-HV	25	2390lm	6000K	80	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-10-WM-LV	25	2450lm	6000K	80	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-23-BM-HV	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-BM-HV-US	25	2390lm	6000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-BM-LV	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-23-BM-LV-UB	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-23-BM-LV-US	25	2450lm	6000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-23-BR-HV	25	2390lm	6000K	80	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-BR-LV	25	2450lm	6000K	80	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-CW-23-GD-HV	25	2390lm	6000K	80	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-GD-LV	25	2450lm	6000K	80	24V DC	23	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-S-25-CW-23-WM-HV	25	2390lm	6000K	80	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-23-WM-LV	25	2450lm	6000K	80	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-BM-HV	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-BM-HV-UB	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-BM-HV-US	25	2390lm	6000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-BM-LV	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-BM-LV-UB	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-BM-LV-US	25	2450lm	6000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-BR-HV	25	2390lm	6000K	80	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-BR-LV	25	2450lm	6000K	80	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-GD-HV	25	2390lm	6000K	80	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-GD-LV	25	2450lm	6000K	80	24V DC	36	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-CW-36-WM-HV	25	2390lm	6000K	80	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-CW-36-WM-LV	25	2450lm	6000K	80	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-10-BM-HV	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-BM-HV-US	25	2350lm	4000K	80	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-BM-LV	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-10-BM-LV-UB	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-10-BM-LV-US	25	2410lm	4000K	80	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-10-BR-HV	25	2350lm	4000K	80	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-BR-LV	25	2410lm	4000K	80	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-NW-10-GD-HV	25	2350lm	4000K	80	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-GD-LV	25	2410lm	4000K	80	24V DC	10	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-S-25-NW-10-WM-HV	25	2350lm	4000K	80	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-10-WM-LV	25	2410lm	4000K	80	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-BM-HV	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-BM-HV-US	25	2350lm	4000K	80	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-BM-LV	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-BM-LV-UB	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-BM-LV-US	25	2410lm	4000K	80	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-BR-HV	25	2350lm	4000K	80	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-BR-LV	25	2410lm	4000K	80	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-GD-HV	25	2350lm	4000K	80	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-GD-LV	25	2410lm	4000K	80	24V DC	23	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-NW-23-WM-HV	25	2350lm	4000K	80	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-23-WM-LV	25	2410lm	4000K	80	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-36-BM-HV	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-BM-HV-UB	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-BM-HV-US	25	2350lm	4000K	80	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-BM-LV	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-36-BM-LV-UB	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-36-BM-LV-US	25	2410lm	4000K	80	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-NW-36-BR-HV	25	2350lm	4000K	80	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-BR-LV	25	2410lm	4000K	80	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-NW-36-GD-HV	25	2350lm	4000K	80	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-GD-LV	25	2410lm	4000K	80	24V DC	36	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-S-25-NW-36-WM-HV	25	2350lm	4000K	80	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-NW-36-WM-LV	25	2410lm	4000K	80	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-BM-HV	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-BM-HV-US	25	2270lm	2700K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-BM-LV	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-BM-LV-UB	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-BM-LV-US	25	2350lm	2700K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-BR-HV	25	2270lm	2700K	90	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-BR-LV	25	2350lm	2700K	90	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-GD-HV	25	2270lm	2700K	90	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-GD-LV	25	2350lm	2700K	90	24V DC	10	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-VW-10-WM-HV	25	2270lm	2700K	90	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-10-WM-LV	25	2350lm	2700K	90	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-23-BM-HV	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-BM-HV-US	25	2270lm	2700K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-BM-LV	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-23-BM-LV-UB	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-23-BM-LV-US	25	2350lm	2700K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-23-BR-HV	25	2270lm	2700K	90	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-BR-LV	25	2350lm	2700K	90	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-VW-23-GD-HV	25	2270lm	2700K	90	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-GD-LV	25	2350lm	2700K	90	24V DC	23	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-S-25-VW-23-WM-HV	25	2270lm	2700K	90	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-23-WM-LV	25	2350lm	2700K	90	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-BM-HV	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-BM-HV-UB	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-BM-HV-US	25	2270lm	2700K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-BM-LV	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-BM-LV-UB	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-BM-LV-US	25	2350lm	2700K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-BR-HV	25	2270lm	2700K	90	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-BR-LV	25	2350lm	2700K	90	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-GD-HV	25	2270lm	2700K	90	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-GD-LV	25	2350lm	2700K	90	24V DC	36	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-VW-36-WM-HV	25	2270lm	2700K	90	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-VW-36-WM-LV	25	2350lm	2700K	90	24V DC	36	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-10-BM-HV	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-BM-HV-US	25	2320lm	3000K	90	100-245V AC	10	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-BM-LV	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-10-BM-LV-UB	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-10-BM-LV-US	25	2390lm	3000K	90	24V DC	10	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-10-BR-HV	25	2320lm	3000K	90	100-245V AC	10	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-BR-LV	25	2390lm	3000K	90	24V DC	10	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-WW-10-GD-HV	25	2320lm	3000K	90	100-245V AC	10	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-GD-LV	25	2390lm	3000K	90	24V DC	10	Dark Grey	Aluminium	DALI

Niviss reserves the right to make technical changes without prior notice
product_card_20261113_214916

	FLOODIE-XL-S-25-WW-10-WM-HV	25	2320lm	3000K	90	100-245V AC	10	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-10-WM-LV	25	2390lm	3000K	90	24V DC	10	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-BM-HV	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-BM-HV-US	25	2320lm	3000K	90	100-245V AC	23	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-BM-LV	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-BM-LV-UB	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-BM-LV-US	25	2390lm	3000K	90	24V DC	23	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-BR-HV	25	2320lm	3000K	90	100-245V AC	23	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-BR-LV	25	2390lm	3000K	90	24V DC	23	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-GD-HV	25	2320lm	3000K	90	100-245V AC	23	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-GD-LV	25	2390lm	3000K	90	24V DC	23	Dark Grey	Aluminium	DALI
	FLOODIE-XL-S-25-WW-23-WM-HV	25	2320lm	3000K	90	100-245V AC	23	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-23-WM-LV	25	2390lm	3000K	90	24V DC	23	White Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-36-BM-HV	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-BM-HV-UB	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-BM-HV-US	25	2320lm	3000K	90	100-245V AC	36	Black Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-BM-LV	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-36-BM-LV-UB	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-36-BM-LV-US	25	2390lm	3000K	90	24V DC	36	Black Mat	Aluminium	DALI
	FLOODIE-XL-S-25-WW-36-BR-HV	25	2320lm	3000K	90	100-245V AC	36	Brown Corten	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-BR-LV	25	2390lm	3000K	90	24V DC	36	Brown Corten	Aluminium	DALI
	FLOODIE-XL-S-25-WW-36-GD-HV	25	2320lm	3000K	90	100-245V AC	36	Dark Grey	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-GD-LV	25	2390lm	3000K	90	24V DC	36	Dark Grey	Aluminium	DALI

	FLOODIE-XL-S-25-WW-36-WM-HV	25	2320lm	3000K	90	100-245V AC	36	White Mat	Aluminium	ON-OFF
	FLOODIE-XL-S-25-WW-36-WM-LV	25	2390lm	3000K	90	24V DC	36	White Mat	Aluminium	DALI

GENERAL TERMS OF USE

- Before using a luminaire, make sure what voltage range it is designed to.
- Connecting to the power supply should be done when the power supply is off.
- Use appropriate sockets and plugs: Ensure that your electrical sockets and plugs are compatible with the lamp's voltage and plug type.
- Use appropriate wiring for luminaires.
- Avoid overloading electrical circuits by not connecting too many lamps to a single outlet or circuit. Check the condition of the power cord and plug for any signs of damage or wear.
- Pay attention to the correct polarity when connecting the luminaires. Incorrect polarity may prevent the luminaires from functioning properly or could potentially damage them.
- Installation of the luminaires should be done by qualified person.
- Keep your luminaires clean and free from dust and debris, as it can affect their performance.
- Follow the luminaire connection diagram above.
- Avoid direct exposure of bright light sources to your eyes. Position luminaires in a way that minimizes direct glare or uncomfortable brightness.
- Ensure that the luminaire is placed on a stable surface and kept away from flammable materials. Allow sufficient clearance around the luminaire to prevent overheating.
- Keep away from fire.

Niviss is not responsible for any damage or failure due to not comply with above rules. Otherwise, the complaint will not be taken into account.

ENVIRONMENTAL CAUTION!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.